


TINKER & RASOR

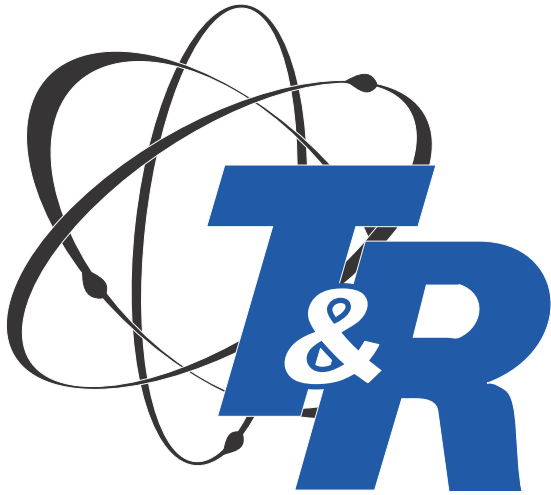

MODEL Quasar **100 Amp GPS** **Current Interrupter**

Features:

- 100 Amp Interrupter (12,000 watt)
- GPS Controlled
- 6v rechargeable battery
- 120v or 240v AC
- 0.005s - 999.999s Cycle ranges
- 72+ Hour backup battery
- Removable magnetic antenna



AVAILABLE FROM STOCK!

Distributed by



TECNOLOGÍA TOTAL
INGENIERÍA EN INTEGRIDAD Y CORROSIÓN
www.tecnologiatotal.net

Other Features Include

- Inside case storage of cables
- Locking lid
- Outside case connections
- Over voltage alarm

www.teststations.com

www.tinker-rasor.com

www.detectron.com


Info@tinker-rasor.com



Tinker & Rasor quality is found in our products,
our people and our customer service.



TINKER & RASOR



CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET

MODEL QUASAR - GPS CURRENT INTERRUPTER

Features:

- Interrupt 100 Amp @ 120 Volt (12,000 watt Max.)
- GPS Timing
- Cycle between 000.005s and 999.999s
- Internal 6v battery
- 110v - 240v Auto sensing AC power supply
- Removable magnetic mount GPS Antenna
- Manual Sync feature
- 10 Program memory
- Transfer program information to multiple units
- GPS unit can sync non-GPS units
- Internal cable storage
- Secure with lid open or closed
- All connections made from outside of case
- Keypad operation with large LCD screen
- Banana jacks for interrupting low current (<5 A)

Construction:

- Rugged carrying case design for rough field use.
- Sealed against dust and water (not immersion)
- Solid state circuitry, no mercury relays
- Rubber grip carrying handle
- Reinforced locking rings, lock with lid open or closed
- Internal storage of cables
- Desert Tan color blends in to surroundings

Applications:

- CIPS
- DCVG
- CP Monitoring
- Pipe - to- Soil Potentials
- Interrupt Ground beds

Specifications:

Display: 0°C to 50°C (32°F to 122°F)

Dimensions:

Overall (Max.) Width: 16.125" (409.575mm)

Overall (Max.) Depth: 9.250" (234.95mm)

Overall (Max.) Height: 13.250" (336.55mm)

DELIVERY: **Immediately from STOCK**
F.O.B. San Bernardino, CA USA

SERVICE: **24-hour Turn-Around**

TERMS: Net30 Days, on approval of credit

WARRANTY: **90 Days**, parts and labor



Cable Storage inside Case